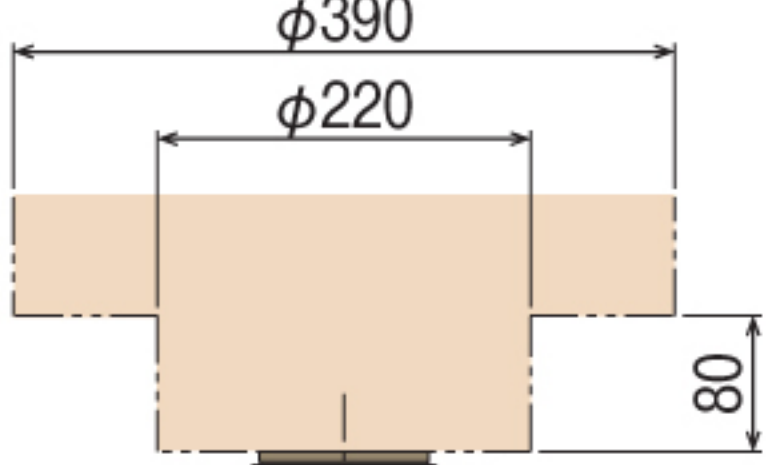
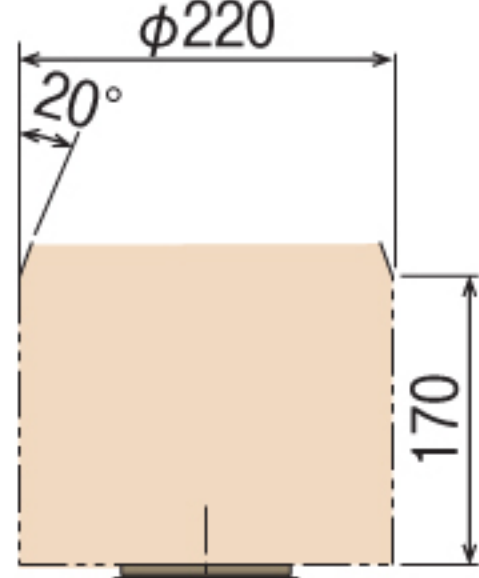
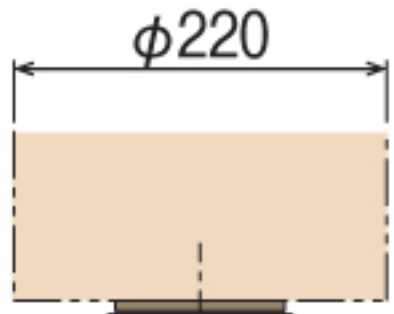
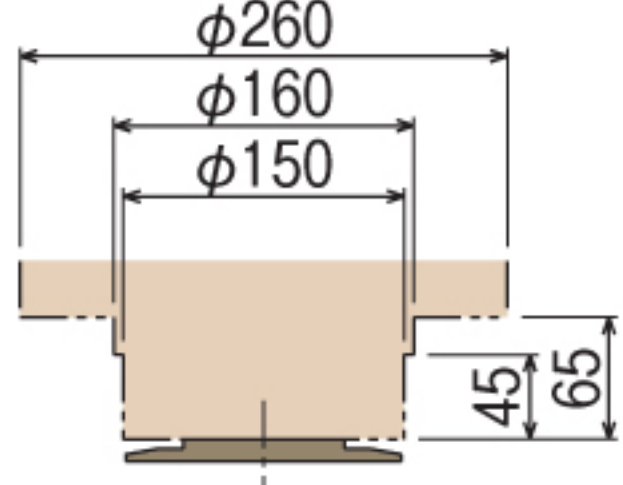
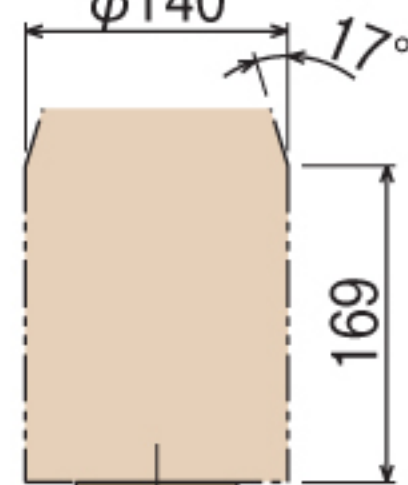
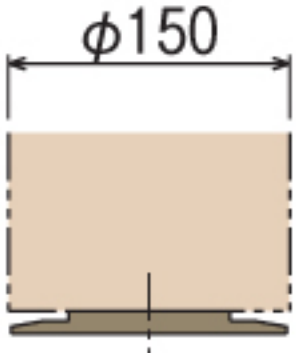
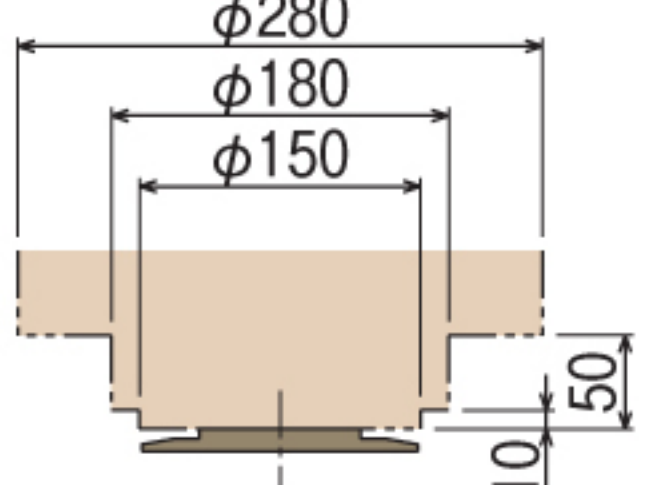
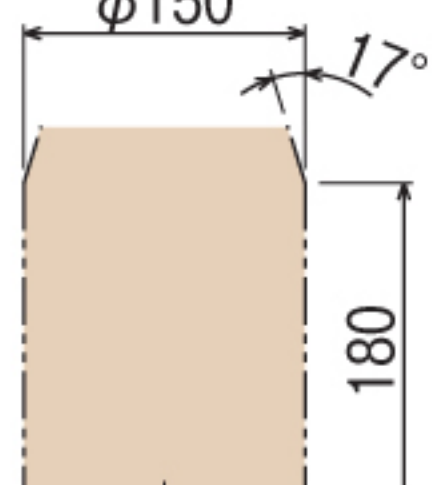
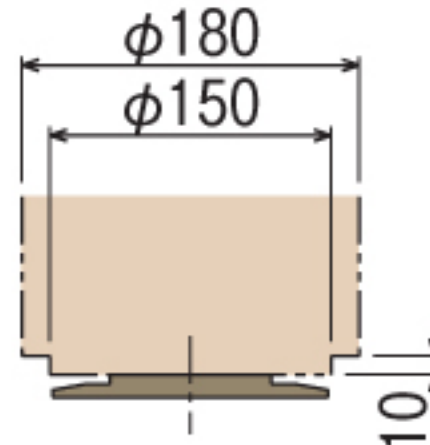
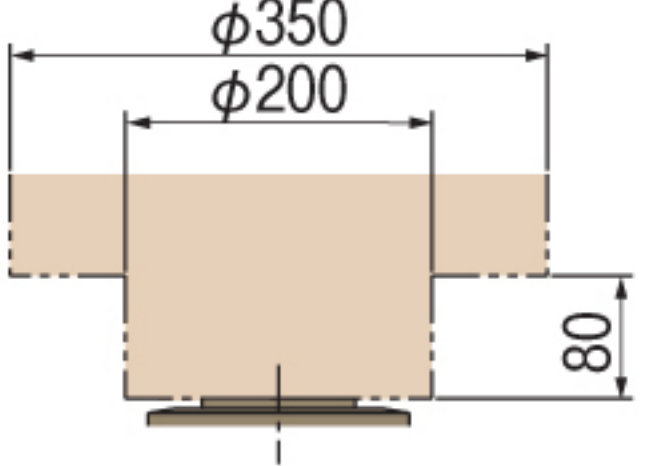
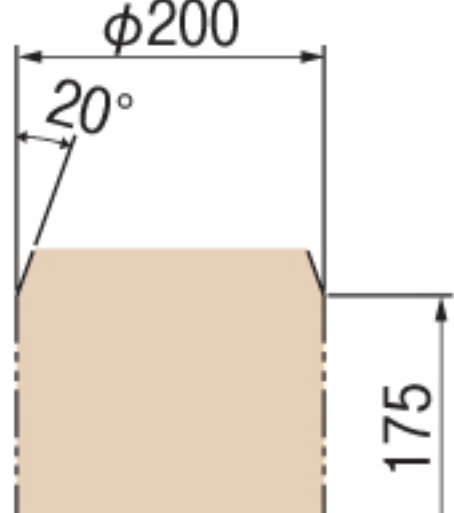

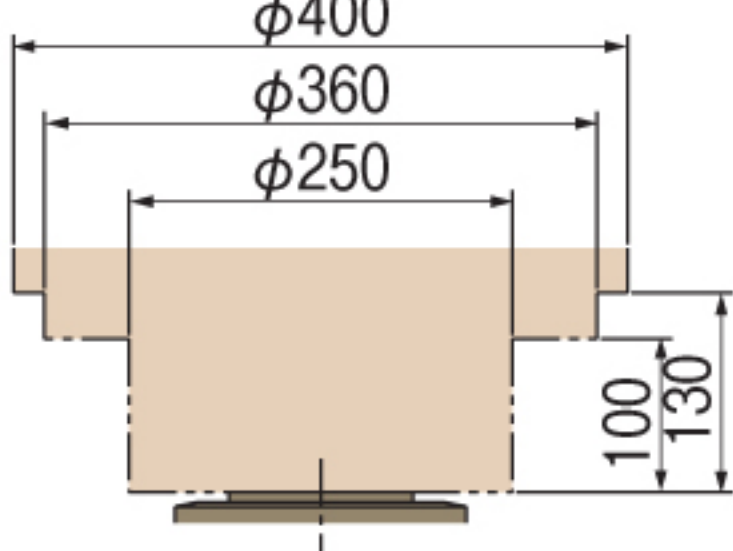
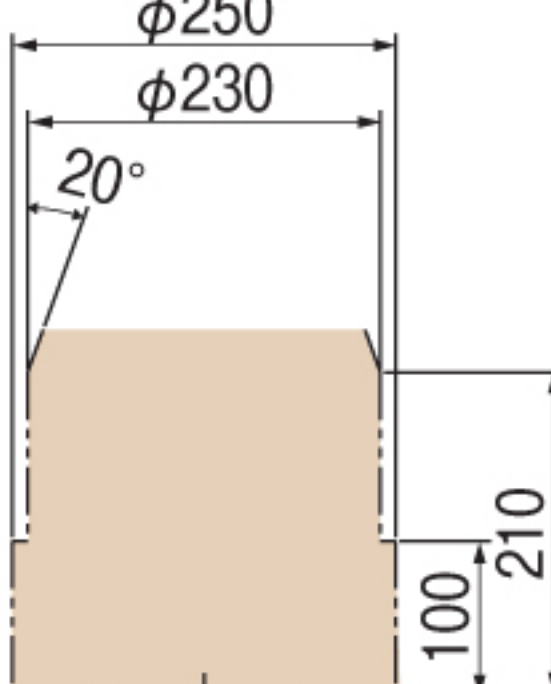
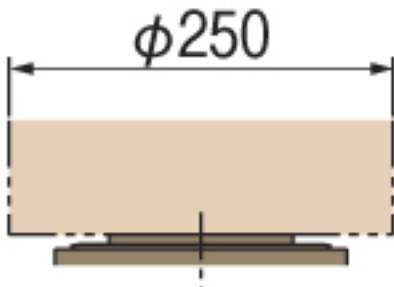
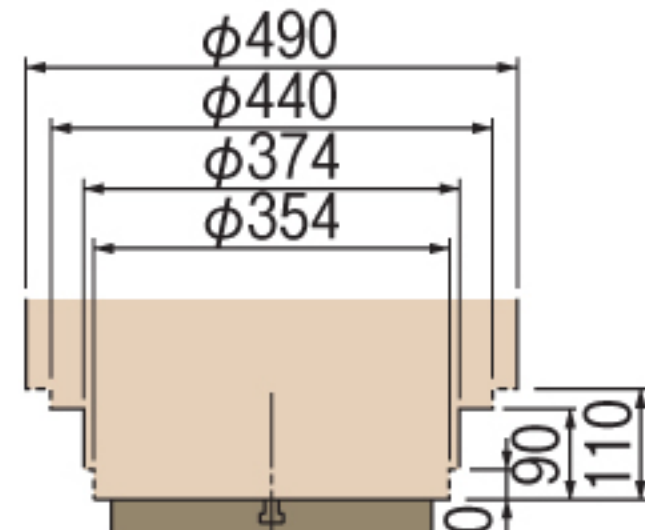
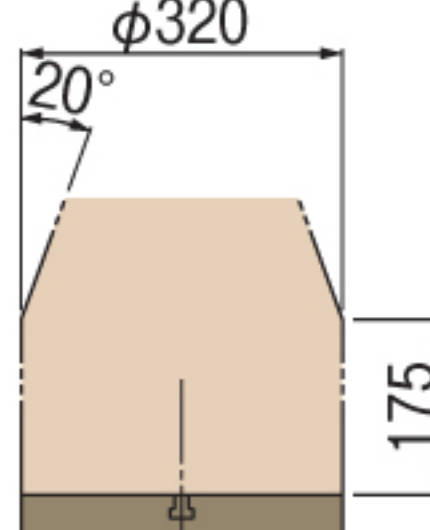
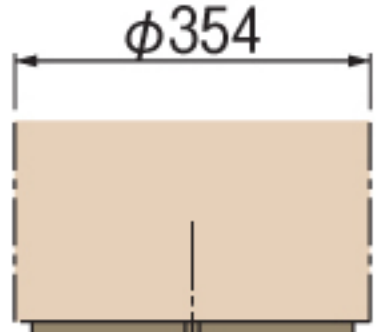
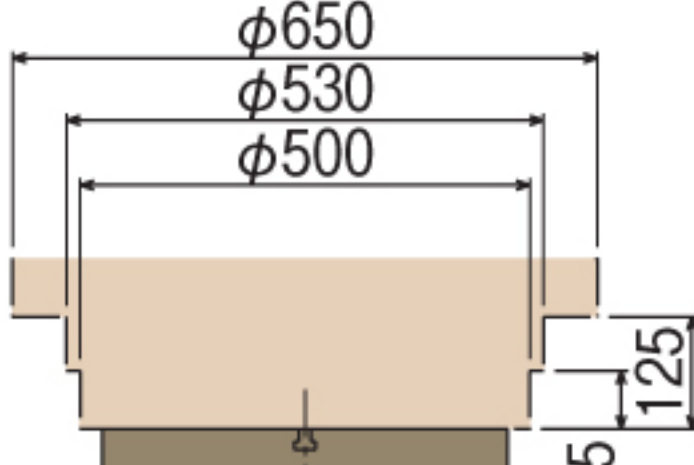
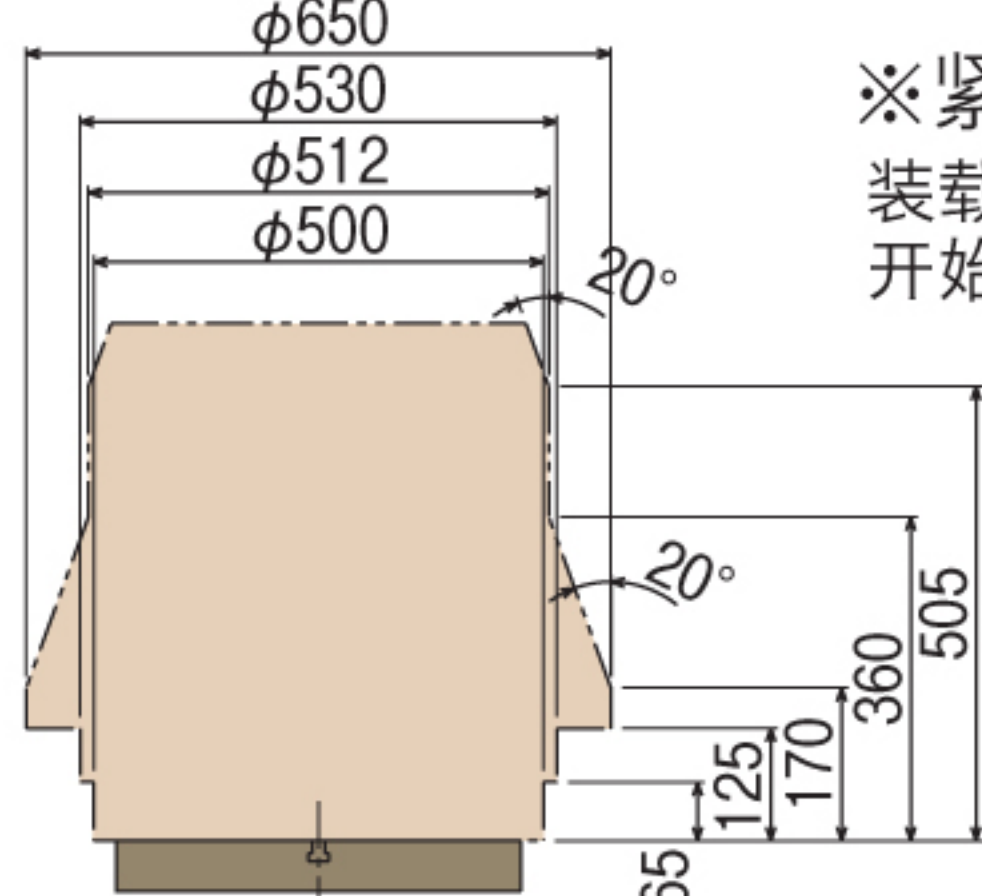


TBS-160	0~+90°	0~+110°	-30°~0
			
TN-101	0~+90°	0~+107°	-17°~0
			
TWA-130	0~+90°	0~+107°	-17°~0
			
TWA-160	0~+90°	0~+110°	-30°~0
			
TWA-200	0~+90°	0~+110°	-30°~0
			
TN-320	0~+90°	0~+110°	-30°~0
			
TN-450	-10°~+95°	-15°~+100°	
		 <p>※紧急停止角度 装载范围包括紧急停止 开始后10°的惯性移动</p>	

注) 1. 超出上述倾斜范围及紧急停止时的运转, 需要另进行检查。
2. 请务必拆下吊环螺栓。