

单位：mm

	卡盘尺寸(英寸)	A	B	C	D	E	F	G	H	I	J	
RBA-250	6	180	18	66	44.3	95	65	44	167	208	71	
	7		18	75	46.3		65	54	192	236		
	9		25	82	55.3		76	70	233	233		
RBA-320	6	240	18	66	44.3	130	101	44	167	216	101	
	7		18	75	46.3			54	192	246		
	9		25	82	55.3			70	233	286		
	10		25	86	53.3			100	274	318		
RBA-400	12	275	25	92	59.3	190	151	110	310	370	151	
	7		20	75	46.3			54	192	286		
	9		25	82	55.3			70	233	286		
	10		25	86	53.3			100	274	336		
RBA-500	15	325	30	100	70.3	220	210	150	385	385	182	
	9		25	82	55.3			170	70	233		356
	12		25	92	59.3			210	110	310		386
	15		30	100	70.3			210	150	385		460
	18		35	114	79.8			210	180	460		500

注) 1. 上述尺寸是(日本)小林铁工株式会社配置的组合卡盘尺寸。 2. 法兰盘的形状和装着方法根据圆盘和爪的尺寸不同有所变化。


RBS
TBS
*RWE/RWA
RN*
*RWE/RWA-B
RNCV-B*
RNCM
RBA
*RBA-K
RNCK*
*RCH
RNC*
*RCV
RNCV*
*RN-N
(多轴)*
TWA/TN
TTNC
THNC
*TTNC-N
(多轴)*
*RC
RH*
RUA
TSUA
RDS
*RTV
RTT*
RCB

 单轴NC
控制器

附件

选项

资料

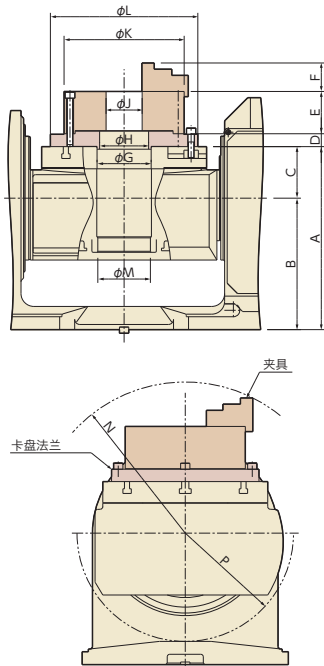

单位：mm

型号	卡盘尺寸(英寸)	A	B	C	D	E	F	G	H	J	K	L	M	N	P			
TBS-160	4	235	180	55	18	58	31.3	55	45	24	112	112	40	R176	R135			
	5					60	37.3							32		132	132	R189
	6					66	44.3							44		167	167	R208
	7					75	46.3							54		192	192	R226
TN-101	4	180	135	45	15	58	31.3	55	45	24	112	112	35	R164	R106			
	5					60	37.3							32		132	132	R177
TWA-130	5	210	150	60	18	60	37.3	55	45	32	132	132	35	R193	R114			
TWA-160	4	235	180	55	18	58	31.3	55	45	24	112	112	40	R176	R135			
	5					60	37.3							32		132	132	R189
	6					66	44.3							44		167	167	R208
	7					75	46.3							54		192	192	R226
TWA-200	5	270	210	60	18	60	37.3	65	55	32	132	132	45	R200	R148			
	6					66	44.3							44		167	167	R219
	7				75	46.3	54							192		192	R236	
	9				82	55.3	70							233		233	R258	
TN-320	6	355	255	100	18	66	44.3	105	95	44	167	256	102	R254	R210			
	7					75	46.3							54		192	256	R271
	9				82	55.3	70							233		286	R294	
	10				86	53.3	100							274		318	R303	
TN-450	12	425	425	0	25	92	59.3	170	150	70	233	316	136	R213	R375			
	10					86	53.3							100		274	336	R222
	12				92	59.3	110							310		370	R244	
	15				30	100	70.3							150		385	445	R288

注) 1. 上述尺寸是(日本)小林铁工株式会社配置的组合卡盘尺寸。

2. 法兰盘的形状和装着方法根据圆盘和爪的尺寸不同有所变化。

规格举例 P.31